



## EHA-SRX – HD-SDI / HD-CCTV to HDMI converter


### Features

- accepts HD-CCTV high definition HD-SDI digital video at 720p50, 720p60, 1080i50 and 1080i60 formats / frame rates
- processes HD-SDI standard at 1,485 Gb/s data rate
- provides standard HDMI output for HD TV monitor display
- integrated cable equalizer for long distance video transmission without loss of quality
- capable of receiving HD-CCTV digital video over 75  $\Omega$  coaxial cable at distances > 100 m (depending on cable type)
- high quality digital video and audio transmission with near zero latency


### Technical data

SDI standard	HD-SDI
Video bandwidth	1,485 Gbps
Video support	720p50, 720p60 1080i50, 1080i60
Input signal	HD-SDI: SMPTE 292M, 296M
Output signal	HDMI
Cable equalization	> 100 m (depending on cable type)
Input connector	1 x BNC (HD-SDI) 3G 75 $\Omega$ inter-locked socket
Output connector	1 x HDMI type A (19-pin female)
Housing	metal case
Power source	12 V DC
Power consumption	2 W max.
Ambient temperature	0 ~ +50°C
Humidity	20% ~ 80%
Dimensions (WxHxD)	77 x 38 x 117 mm
Weight	200 g

### System example

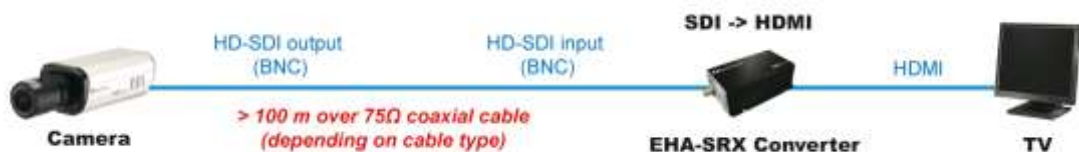

## Dimensions

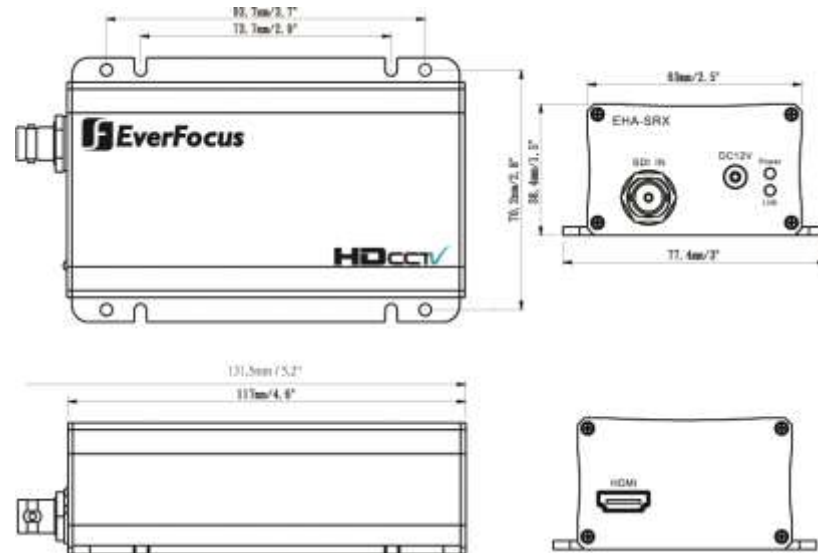

## Ordering information

EHA-SRX	HD-SDI to HDMI converter, 12 V DC
---------	-----------------------------------